



SUMMARY OF TEMPERED DOOR

	Standard Type	Combination Type	Patch Type	Sliding Type	Shower Type							
Model												
	Swing Open			Slide Open	Swing Open							
Type of glass	12mm Thickness	Clear Float Bronze Float	Green Float Blue Float									
Framing materials	Hairline Stainless Steel Polished Stainless Steel } By Others Aluminium Anodised											
Opening & closing system	<ul style="list-style-type: none"> ° Floor hinge ° Swing-type motor Automatic Swing a) Mat activated type b) Finger pressure activated type c) Sensory type [Radar activated] } By Others			<ul style="list-style-type: none"> ° Slide-type motor a) Mat activated type b) Finger pressure activated type c) Sensory type 								
LOCK	CYLINDER LOCK				NONE							
Hole position for handle	<ul style="list-style-type: none"> ° Standard Position of holes <table border="1"> <thead> <tr> <th>Handle Type</th> <th>a</th> <th>b</th> <th>c</th> </tr> </thead> <tbody> <tr> <td>Bar Type</td> <td>275</td> <td>100</td> <td>864</td> </tr> </tbody> </table> <ul style="list-style-type: none"> ° Number of holes: 2 ° Hole diameter: 15mm 	Handle Type	a	b	c	Bar Type	275	100	864	Other	<ul style="list-style-type: none"> ° Handle Holes position: To Suit ° Base for upper suspension: Variable to suit manufacturer's details 	Variable to suit manufacturer's details
Handle Type	a	b	c									
Bar Type	275	100	864									

Drilling and notching dimension for Patch Type Tempered Door

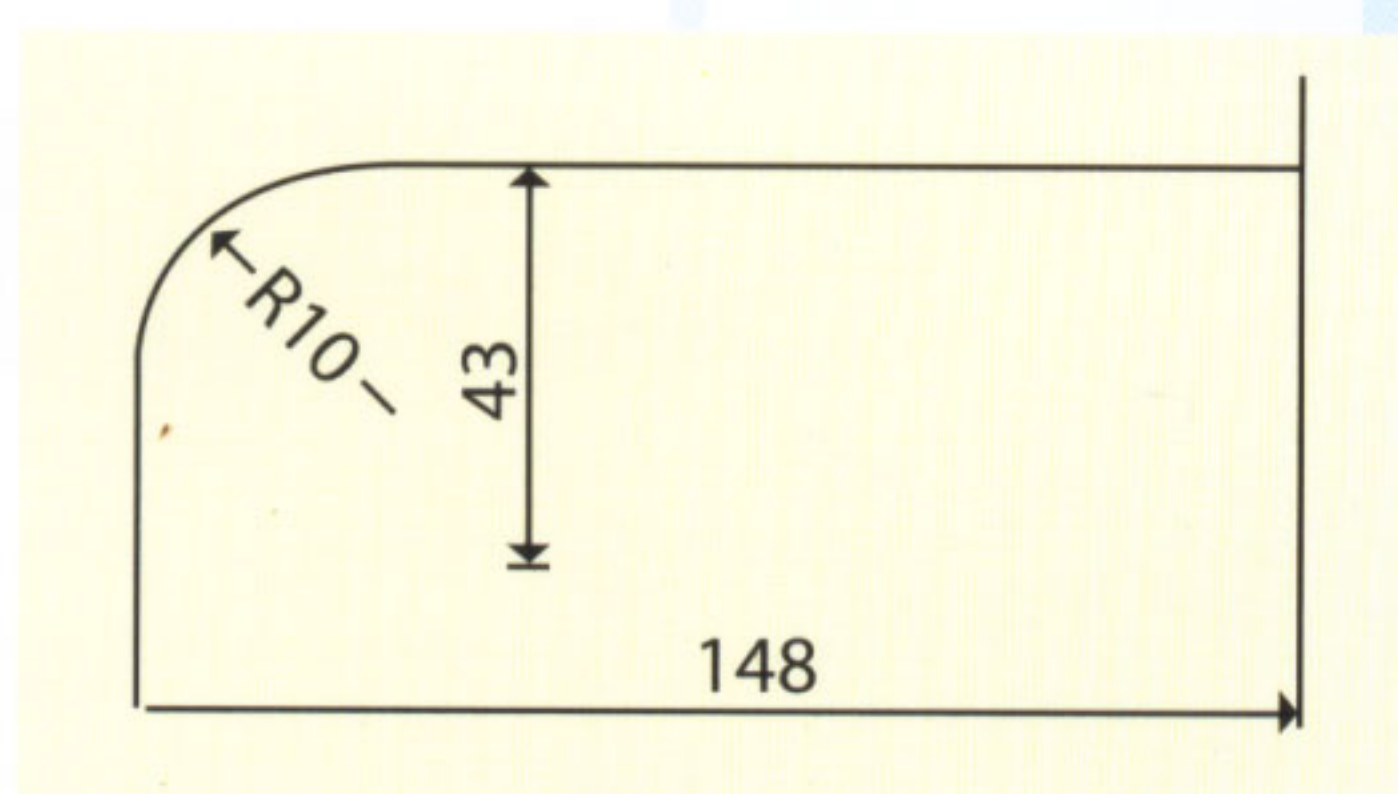

Lock Patch

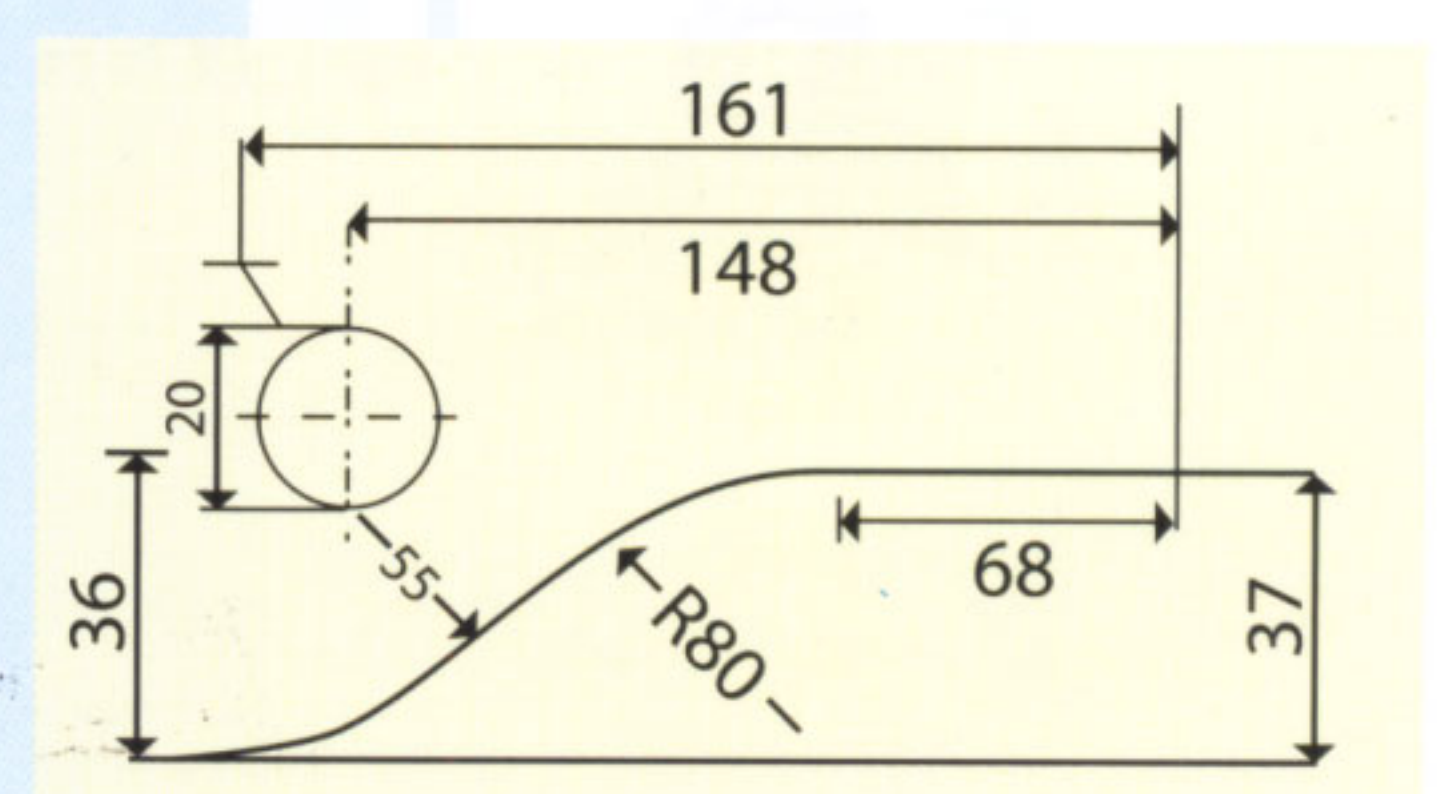

Corner Patch (Combination & Patch Type Only)